


Steel expansion joint - Type SA-24

Lateral expansion joint, movable in one plane

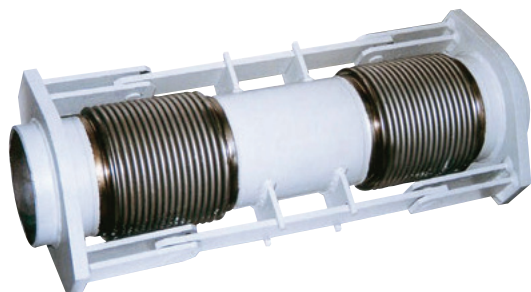

Customized production

Structure type SA-24

- Vacuum-proof lateral expansion joint consisting of two stainless steel bellows with connecting pipe and welded pipe ends (welding ends)
- Welded joint bars with double hinge restraints to absorb reaction force
- Long connecting pipes allow large lateral movements

Steel bellows PN 6 / PN 10

- Multiple convolution bellows in various stainless steel grades
- One ply or multi-ply structure

Material grade *	Material No. as per DIN EN	Temperature**	Possible uses
Stainless steel	1.4541	-196 °C up to +550 °C	Low temperature, acids, lyes, gases, fertilizers
	1.4404, 1.4571	+550 °C	Media containing chloride, oil, soap, drinking water, food stuff, petrol

* Check or inquire about the resistance of material grades to temperature and medium.

** Check or inquire about reduction in pressure by temperature.

Welding ends / connecting pipe

Version

- Welded pipe ends and connecting pipe

Dimensions

Standard: see tables of type SA-13
Others: DIN EN, ANSI, BS etc.

Materials

Standard: 1.0345 (P235GH)
1.0038 (S235JR)

Others: stainless steel etc.

Corrosion protection

Standard: anti-corrosion primed
Others: special varnish, etc.

Note

Please comply with the general technical instructions regarding reaction force, moving force, fixed point load, installation instructions, etc.

Subject to technical alterations and deviations resulting from the manufacturing process.

Type SA-24

Applications

- for compensating large lateral movement
- for reducing tension
- for installation in
 - industrial applications
 - pipe line and plant construction

Hinge restraints

- Pivot of joint bars at center of bellows
- Joint bars control bellows movement

Materials

Standard: 1.0038 (S235JR)
Others: stainless steel, etc.

Corrosion protection

Standard: anti-corrosion primed
Others: special varnish, etc.

Special designs

Other sizes (DN), lengths or pressure ratings on request.

Certificates

- CE (DGR 97/23/EC)

Version

